


Female Interlock – Material:
O-2, 50-52 HRC - Black Oxide
Male Interlock – Material:
A-2, Core: 58-60 HRC, Surface: 80 HRC
Surface Treatment: Titanium Nitride Coated

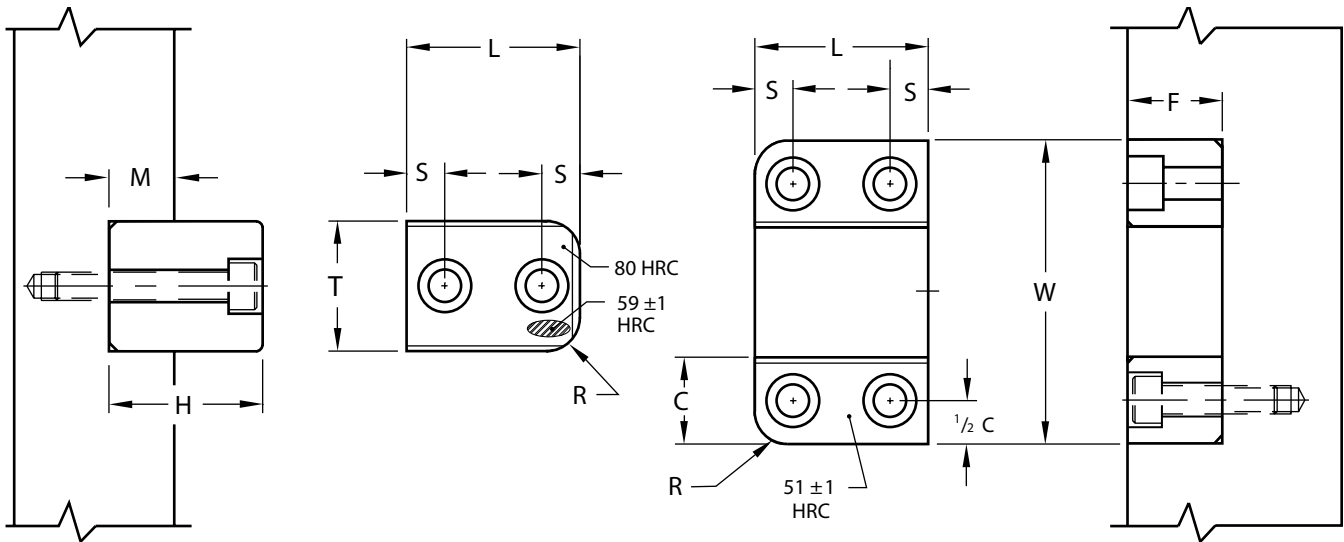

REF	L +0,00 -0,25	W	C +0,00 -0,01	F +0,00 -0,12	T +0,00 -0,01	M	H -0,0 -0,2	S ±0,2	R Pocket Radius	SHCS (F)	SHCS (M)
BGGL25x45	25	45	15	15	15	10	24	7	4	M4x14	M4x25
BGGL40x65	40	65	20	20	25	15	34	10	9	M5x22	M5x35
BGGL50x90	50	90	25	25	40	20	44	10	9	M6x30	M6x45
BGGL65x160	65	160	55	30	50	25	54	15	14	M8x35	M8x60

Screws included

Additional option:
Guide Locks are also available with dual radii for mounting internally as shown at the left. To order, specify the REF followed by "-R".
Ex. BGGL65X160-R. E-mail order@imc.se for more info

