

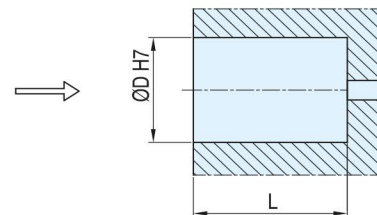





Mat.: Stainless steel  
 Hardness: 50-55 HRC  
 Max. T: 150°C

Remove inner insert from the outer insert using a screwdriver



REF*	REF	REF*	Number of years	D	L	F	M
UYM0420**	UOM 04	UOY04/420**	4	4	8	2,4	M1,6x0,2
UYM0520**	UOM 05	UOY05/420**	4	5	8	2,9	M1,6x0,2
UYM0620**	UOM 06	UOY06/420**	4	6	8	3,7	M1,6x0,2
UYM0820**	UOM 08	UOY08/420**	4	8	10	5,0	M2,3x0,25
UYM1020**	UOM 10	UOY10/420**	4	10	12	6,3	M2,5x0,35
UYM1220**	UOM 12	UOY12/420**	4	12	14	7,5	M3x0,35
UYM1620**	UOM 16	UOY16/420**	4	16	14	11,0	M4x0,35
UYM2020**	UOM 20	UOY20/420**	4	20	16	13,2	M4x0,35




\*Specify year. Example:  
 UYM042021

## DATE STAMPS-INNER INSERTS

## O UU-YUU

Mat.: Corrosion resistant steel  
 Hardness: 50-55 HRC

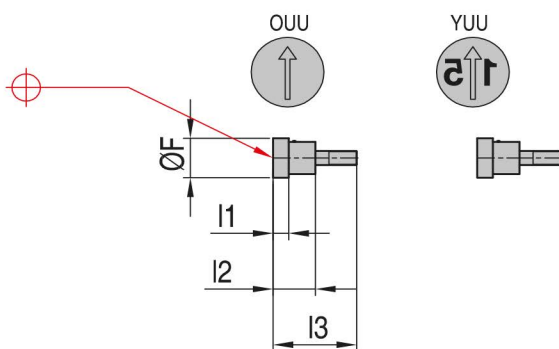

REF	REF*	F	l1	l2	l3
O UU 04	YUU0420**	2,4	1,5	4,5	7,7
O UU 05	YUU0520**	2,9	1,5	4,5	7,7
O UU 06	YUU0620**	3,7	1,5	4,5	7,7
O UU 08	YUU0820**	5,0	2,0	5,5	9,7
O UU 10	YUU1020**	6,3	2,5	6,5	11,7
O UU 12	YUU1220**	7,5	2,5	6,8	13,7
O UU 16	YUU1620**	11,0	2,5	6,8	13,7
O UU 20	YUU2020**	13,2	3,5	8,5	15,7



\*Specify year. Example: YUU042021